



Single Seat Kit for the MONKEY Instruction Manual

Item No. : 09 - 11 - 0124 (TL Type)
: 09 - 11 - 0125 (Mesh Type)
Applicable to : MONKEY (FI)
Frame No. : AB27-1900001 ~

Thank you for purchasing one of our products. Please strictly follow the instructions in installing and using the kit.
Before installing the kit, please be sure to check the kit contents. Should you have any questions about the kit, please contact your local TAKEGAWA dealer.

Please note: Illustrations and photos may vary from actual hardware.

NOT applicable with the stock carrier because the seat interferes. To install this kit, please replace with the genuine carrier for Z50J-1600008 ~ 2499999 or install our Carrier Less Kit.

The stock carrier The genuine parts No. : 81200-165-710

Z carrier standard type : 09-11-0119

Short type : 09-11-0118

Carrier Less Kit : 09-11-0101

This seat cannot be installed at the stock battery location under the seat, because the stock battery case interferes with this seat. The battery is to be moved to other location. Please install our Battery Relocation Kit.

Battery Relocation Kit : 05-06-0007

Please read the following instructions before installation.

We do not take any responsibility for any accident or damage whatsoever arising from the use of the products not in conformity with the instructions in the manual.

We shall be held free from any kind of warranty whatsoever of products other than this product if the glitch takes place on the other products than this one after the installation and use of this product.

We do not have any information or service data on the combination of our products and other manufacturer's products.

These seats are our original ones, coming in TL type and mesh type.

This seat is designed for a one-person ride. Therefore, unpredictable troubles may occur when a motorcycle is ridden by a person weighing more than 75 kg or ridden double. Please refrain from such driving.

Due to individual differences of seat and motorcycle frame sizes, the seat may interfere with the rear luggage rack.

CAUTION

The following show the envisioned possibility of injuries to human bodies and property damage as a result of disregarding the following cautions.

Always use a torque wrench to tight bolts and nuts securely to the specified torque to avoid these parts getting damaged or loose.

Before riding, always check such parts as screws for loose. If you find loose ones, screw them securely up to the specified torque to avoid parts coming off.

In some cases, the reverse side and bracket of the seat have sharp-pointed or protruding portions. So, please work with your hands protected with thick gloves. (Otherwise, you may suffer injuries.)

WARNING

The following show the envisioned possibility of human death or serious injury as a result of disregarding the following cautions.

Those who are technically unskilled or inexperienced are required not to do the work.

(Improper installation could lead to overturning or accidents as a result of parts breakage.)

When you notice something abnormal with your motorcycle, stop riding immediately in a safe place to avoid an accident.

Always drive the engine in a well-ventilated place, and do not switch the engine on in an airtight place.

(Otherwise, you will suffer from carbon monoxide poisoning.)

Before working, place the motorcycle on level ground to stabilize its position for safety to avoid the motorcycle overturning.

This seat is designed for a single ride. Do not ride double. (Otherwise accidents may occur.)

Please be informed that, mainly because of improvement in performance, design changes, and cost increase, the product specifications and prices are subject to change without prior notice.

This manual should be retained for future reference.

~ Kit Contents ~



No.	Parts Name	Qty	Repair Part Item No.	in packs of
1	Seat	1		
2	Seat bracket, A (Front)	1	77105-GEL-T00	1
3	Right-side seat bracket	1	09-11-0512	1SET
4	Left-side seat bracket	1		
5	Flange nut M6	6	00-00-0173	6

Please note that in ordering repair parts, be sure to quote the Repair Part Item No. Otherwise, we may not be able to accept your orders.

There are some parts, however, for which we are not in a position to accept your order in just the quantity to be used. In this case, please take them in the quantity packed.

~ Installation Procedures ~

Prepare right tools for installation, and ensure that the motorcycle is secure.

This seat cannot be installed at the stock battery location under the seat, because the stock battery case interferes with this seat.



Please install our battery relocation kit. Install this kit on the vehicle equipped our battery relocation kit(05-06-0007). This procedure explains for the vehicle equipped our battery relocation kit.



Install the carrier.

Applicable carrier

The genuine Honda carrier :81200-165-710

Z carrier standard type :09-11-0119

Short type :09-11-0118



Carrier Less Kit :09-11-0101



Install the seat bracket A and seat bracket L & R with a flange nut onto the stud bolt on the reverse side of the seat, and tighten them to the specified torque.

⚠ Caution: Apply the specified torque.
Torque: 8 N · m (0.8 kgf · m)

Tighten temporarily and adjust as required, then tighten properly.

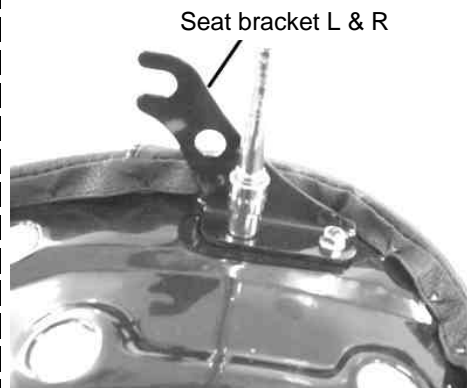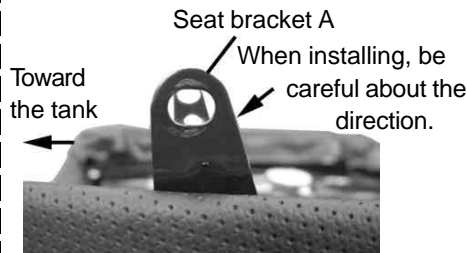

Just in the same way as a standard seat is installed, put the seat bracket in the space between two washers inside the rear shock absorber, and install a seat bracket A with a standard bolt and nut, and tighten them to the specified torque.


⚠ Caution: Apply the specified torque.

Nut on the upper end of the rear shock

Torque: 29 N · m (3.0 kgf · m)

M8 nuts on the seat bracket A

Torque: 24 N · m (2.4 kgf · m)

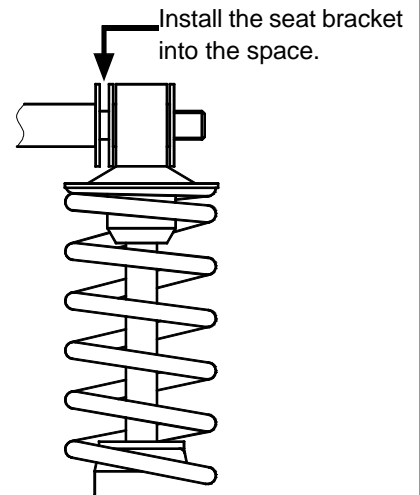

Reinstall the side cover.

Please install our side cover (ABS type) (See the instruction manual.)

white : 09-11-0021

black : 09-11-0022

carbon print : 09-11-0023

mirror coat : 09-11-0024



SPECIAL PARTS TAKEGAWA Co.,Ltd.

3-5-16 Nishikiorihigashi Tondabayashi Osaka Japan

TEL : 81-721-25-1357 FAX : 81-721-24-5059

URL : <http://www.takegawa.co.jp>