



Instruction Manual for Single Seat Kit for the MONKEY

Item Nos : 09 - 11 - 0016 (TL Type)
: 09 - 11 - 0017 (Mesh Type)
Applicable to : MONKEY
Frame Nos : Z50J -1600008 ~ 2499999
: AB27-1000001 ~ 1399999

Thank you for purchasing one of our TAKEGAWA's products. Please strictly follow the following instructions in installing and using the products. Before fitting the products, please be sure to check the contents of the kit. Should you have any questions about the products, please kindly contact your dealer.

Please note that the descriptions in this manual like illustrations and photos may differ from the actual hardware.

Please read the following instructions before installation.

We do not take any responsibility for any accident or damage whatsoever arising from the use of the products not in conformity with the instructions in the manual.

We shall be held free from any kind of warranty whatsoever of products other than this product if the glitch takes place on the other products than this one after the installation and use of this product.

You are kindly requested not to contact us about the combination of our products with other manufacturers'.

These seats are our original ones, coming in TL type and mesh type. You can install the seat with a standard carrier being installed.

This seat is designed for a one-person ride. Therefore, unpredictable troubles may occur when a motorcycle is ridden by a person weighing more than 75 kg or ridden double. Please refrain from such driving.

Due to individual differences of seat and motorcycle frame sizes, the seat may interfere with the rear luggage rack.

This product cannot be installed onto motorcycles with a frame number of Z50J-1300017 ~ 1510400 and from AB27-1400001 onward because of the difference in the carrier shape. However, the change of the carrier to the one installed on the motorcycle of a frame number from Z50J-1600008 onward or just the installation of either a Z-carrier or a grab bar makes it possible to install this product onto these motorcycles mentioned above.

CAUTION The following show the envisioned possibility of injuries to human bodies and property damage as a result of disregarding the following cautions.

Always use a torque wrench to screw bolts and nuts tight and securely to the specified torque.

(Improper torque could cause these parts to get damaged or fall off.)

Before riding, always check every section for slack in parts like screws. If you find slack ones, screw them securely up to the specified torque.

(Or improper torque may cause parts to come off.)

In some cases, the reverse side and stay of the seat have sharp-pointed or protruding portions. So, please work with your hands protected with thick gloves. (Otherwise, you may suffer injuries.)

WARNING The following show the envisioned possibility of human death or serious injury as a result of disregarding the following cautions.

Those who are technically unskilled or inexperienced are required not to do the work.

(Improper installation could lead to overturning or accidents as a result of parts breakage.)

When you notice something abnormal with your motorcycle while riding down a road, stop riding immediately and park your motorcycle in a safe place. (Otherwise, the abnormality could lead to an accident.)

Always drive the engine in a well-ventilated place, and do not switch the engine on in an airtight place.

(Otherwise, you will suffer from carbon monoxide poisoning.)

Before doing work, place the motorcycle on level ground to stabilize the position of your motorcycle for safety's sake.

(Otherwise, your motorcycle could fall down and injure you while you are working.)

This seat is designed for a single ride. Do not ride double. (Otherwise accidents may occur.)

Please be informed that, mainly because of improvement in performance, design changes, and cost increase, the product specifications and prices are subject to change without prior notice.

This manual should be retained for future reference.

~ Kit Contents ~



No.	Parts Name	Qty	Repair Part Item No.	in packs of
1	Seat	1	—	—
2	Seat stay, A (Front)	1	77105-GEF-T10	1
3	Right-side seat bracket	1	77103-GEF-T00	1
4	Left-side seat bracket	1	77104-GEF-T00	1
5	Flange nut M6	6	00-00-0173	6




Please note that in ordering repair parts, be sure to quote the Repair Part Item No. Otherwise, we may not be able to accept your orders. There are some parts, however, for which we are not in a position to accept your order in just the quantity to be used. In this case, please take them in the quantity packed.

~ Installation Procedures ~

Prepare right tools for installation, and ensure that the motorcycle is secure.

Install the seat stay A and seat bracket L & R with a flange nut onto the stud bolt on the reverse side of the seat, and tighten them to the specified torque.

⚠ CAUTION: Be sure to tighten to the specified torque. **T: 8 N · m (0.8 kgf · m)**

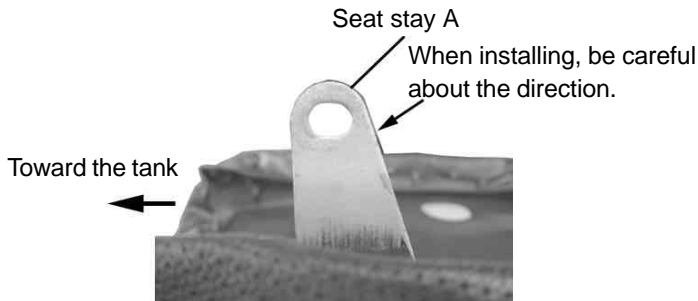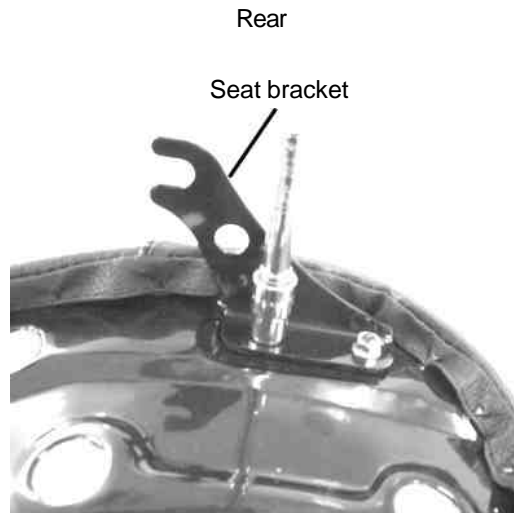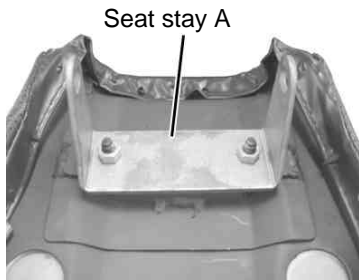

Detach the side cover, loosen nuts on the upper end of the rear shock absorber, remove M8 bolts and nuts fixing a standard seat to the frame, and then remove the standard seat.

Just in the same way as a standard seat is installed, put the seat bracket in the space between two washers inside the rear shock absorber, and install a front stay with a standard bolt and nut, and tighten them to the specified torque.

⚠ CAUTION: Be sure to tighten to the specified torque.

Nuts on the upper end of the rear shock

T: 29 N · m (3.0 kgf · m)

M8 nuts on the front stay

T: 24 N · m (2.4 kgf · m)

Reinstall the side cover.

SPECIAL PARTS TAKEGAWA Co.,Ltd.
 3-5-16 Nishikiorihigashi Tondabayashi Osaka Japan
 TEL : 81-721-25-1357 FAX : 81-721-24-5059
 URL : <http://www.takegawa.co.jp>